

POWER SUPPLY - GFCI / GROUNDING BONDING




← Power Distribution Center

Power Cord Set

- 25 foot
- 50 foot
- 100 foot


- with:
- 2 GFCI modules
- 4 Outlet Receptacles
- 4 Circuit Breakers
- Rubber Feet and 10 ft. Cord

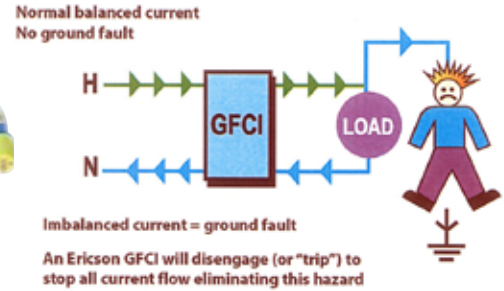

Grounding Assemblies

To satisfy the requirements for grounding and bonding of containers, cabinets, drums, totes and other industrial applications, our clamps and cables can be assembled in various configurations.

Our standard assemblies offer 1/8" diameter, flexible stainless steel cable in 3-ft lengths. Our **REB2960** clamp is incorporated to penetrate multiple layers of paint or corrosion build-up. For non-painted surfaces or when corrosion is not a problem, copper alligator clips may be substituted for the REB2960 clamp. Other cable lengths and orange or clear vinyl coated cable are available upon request.

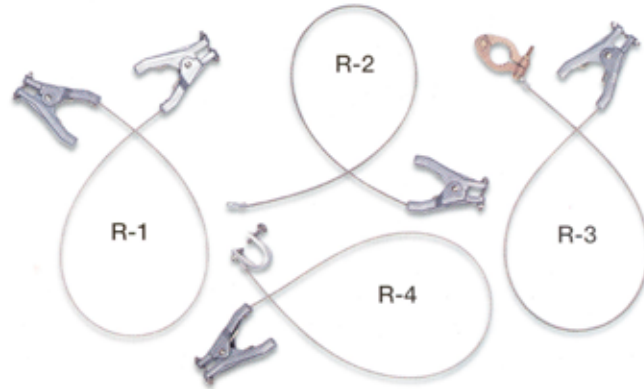


- R-1 (2) REB2960 clamp, and 3-ft cable.
- R-2 (1) REB2960 clamp, 3-ft cable & Lug
- R-3 (1) REB 2960 clamp, 3-ft cable & 1" pipe clamp
- R-4 (1) REB2960 clamp, 3-ft cable & EP1 clamp
- A-1 (2) Alligator clips and 3-ft cable
- A-2 (1) Alligator clip, 3-ft cable & Lug.

Retract-A-Clamps (RAC)

The RAC coiled static grounding and bonding assemblies provide a cost effective and easy-to-use system. The assemblies incorporates a corrosion resistant, orange vinyl coated coiled cable and either our REB2960 clamp or our other series of clamps.

The RAC assemblies with REB2960 clamp use 1/8" cable in lengths of 5 ft, 10 ft and 20 ft.

The RAC assemblies with either the GAT-P or G40PC clamps use 3/16" cable in lengths of 20 ft and 25 ft.

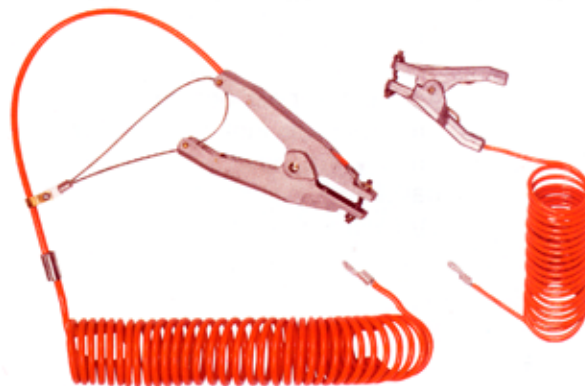

Model	Description
RAC 5	5 ft. of Cable and REB Clamp
RAC 10	10 ft. of Cable and REB Clamp
RAC 10+10	20 ft. of Cable and REB Clamp
RAC 20	20 ft. of Cable and GAT-P Clamp
RAC 10-2	10 ft. of Cable and 2 REB Clamps
RAC 10-P	10 ft. of Cable with REB & 1/2" Pipe Clamp